

sensing the future



## ClickLine CoverLine StandardLine

Electrical safety edges and rubber profiles with 20 mm contact strips for automatic gates, doors, public transport and industrial applications

Reliable, proven, suitable for self-assembly

- Suitable profile for every application
- Best electrical properties
- High mechanical load capacity
- Quick assembly because of special profile shapes
- Conformity acc. to EN 12978

# Electrical safety edges

## For automatic gates, doors, public transport and industrial applications

### Reliable, tried-and-tested as the best


Electrical safety edges are used for protecting crushing and shearing points on automatic gates, doors, shutters and grills. Profiles of different sizes in combination with various switching devices safely and reliably protect people and objects according to the applicable standards.

### Quick and easy to install

Our safety edges are based on the tried-and-tested principle of the contact strip drawn into the rubber profile. They are available both prefabricated at the factory and as system parts for self-assembly by the customer. The ingenious structure with separate contact strips can be relied upon for high reliability even in unusual applications and also facilitates retrofitting on site.



## Safety edges – system overview

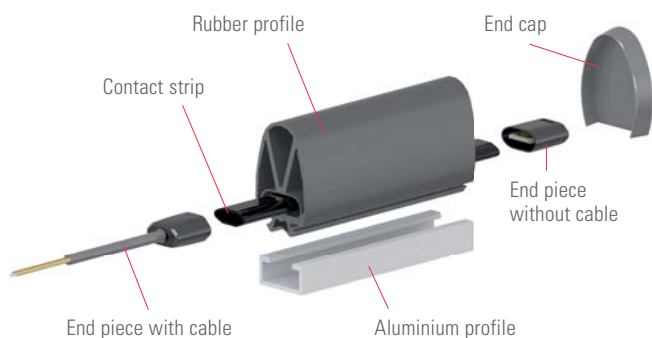

## End pieces

### Maximum flexibility


End pieces matching the contact strips are available with or without terminating resistor (standard 8.2 kOhm) and with various cable lengths.



## Safety edge assembly

### Self-assembly – quick and easy

Safety edges can be self-assembled without problems and within the quickest possible time

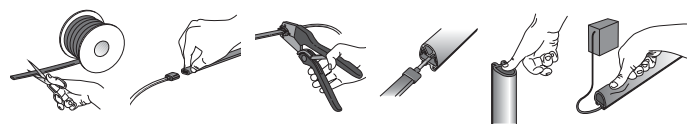

Detailed installation and operating instructions are included with the product

### Pre-assembled – individual and convenient

For optimum functionality, a distinction can be made between horizontal and vertical application:





- ① Rubber profile sealed **on both ends** with end caps  
→ primarily for horizontal safety edge application
- ② Rubber profile **closed at top** with end cap,  
**open at bottom** with profile holder  
→ for vertical safety edge application only



## Contact strips – perfect sensors

### ENT-R: the all-rounder

This robust contact strip is especially suited for applications in moist conditions or with a large mechanical load

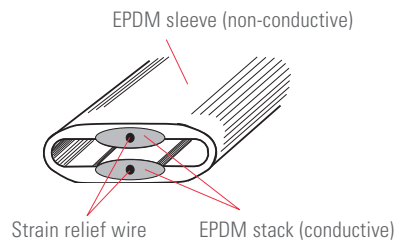

## Reliable in every application

### Situation


Sliding gate

### Solution

- Safety edge (ClickLine or CoverLine) in combination with the InTra6 inductive transmission system

### Advantages

- Optimum protection because of mobile and stationary safety edges acc. to cat. 2 or cat. 3
- Tip: ProLoop 2, reliable monitoring and evaluation of induction loops as opening sensor



### Situation


Sectional gate

### Solution

- Safety edge (ClickLine, CoverLine or StandardLine) in combination with the radio transmission system RFGate 2

### Advantages

- Optimum protection because of mobile safety edges acc. to cat. 2
- Tip: Herkules 2 gate radar as opening sensor. It distinguishes between vehicles and people



### Situation


Folding gate

### Solution

- Safety edge (ClickLine, CoverLine or StandardLine) in combination with the radio transmission system RFGate 2

### Advantages

- Optimum protection because of mobile safety edges acc. to cat. 2
- Tip: Depending on the gate height, Herkules 2 or Merkur 2 as reliable opening sensor



### Situation


Revolving door

### Solution

- Safety edge (ClickLine, CoverLine or StandardLine) in combination with a switching device

### Tip

- Merkur 2 as reliable opening sensor



## Rubber profiles with click-fit foot

### Click-fit!

The easiest possible installation is a feature of ClickLine: Click and go. No need for time-consuming pushing in from the side. This means even damaged safety edges can be renewed quickly and effortlessly. The optimally designed profile shape also guarantees the greatest possible switching reliability.









## ClickLine profile types

General technical data on rubber profiles and prefabricated safety edges can be found on the back page.

### Dimensions

(Dimensions in mm, tolerances acc. to DIN ISO 3302-1, tl. E2)




Rubber profile	EPE025/029A0V	EPE030/042A0V	EPE030/042J2V	EPE036/045A0V	EPE036/045J2V	EPE036/065A0V
Article no.	210736	210751	210752	210760	210761	210764
Packing unit	50 m	50 m	50 m	25 m	25 m	25 m
Aluminium rail (max. length 6 m)	AP-5	AP-5	AP-5	AP-8	AP-8	AP-8
Safety edges (prefabricated)	ELE025/029A0Vx	ELE030/042A0Vx	ELE030/042J2Vx	ELE036/045A0Vx	ELE036/045J2Vx	ELE036/065A0Vx
Activation distance	7 mm	6 mm	10 mm	10 mm	15 mm	10 mm
Switch point force	70 N	60 N	100 N	50 N	90 N	110 N
Overtravel*						
250 N	8 mm	18 mm	5 mm	21 mm	17 mm	21 mm
400 N	10 mm	20 mm	14 mm	22 mm	20 mm	25 mm



## Rubber profiles for high visual requirements

### The synthesis of practicality and appearance

The aluminium profile is covered by the lateral attachment principle. This results in a uniform appearance that blends very well even into even demanding designs. The installation is quick and easy: simply click in, no need for pulling in sideways. CoverLine is especially suitable for vertical installation (sliding gate at site entrances) and for long overtravel distances. Specially developed profiles guarantee the highest switching reliability.





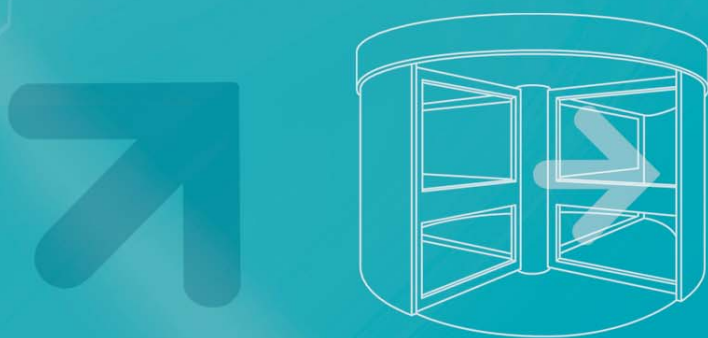


## CoverLine profile types

General technical data on rubber profiles and prefabricated safety edges can be found on the back page.

### Dimensions

(Dimensions in mm, tolerances acc. to DIN ISO 3302-1, tl. E2)



Rubber profile	EPE040/055A0J	EPE040/080A0J	EPE040/067A0J	EPE040/081A0J	EPE040/105A0J
Article no.	210766	210767	354468	262476	219341
Packing unit	30 m	20 m	20 m	20 m	25 m
Aluminium rail (max. length 6 m)	AP-G1	AP-G1	AP-G1	AP-G1	AP-G1
Safety edges (prefabricated)	ELE040/055A0Jx	ELE040/080A0Jx	ELE040/067A0Jx	ELE040/081A0Jx	ELE040/105A0Jx
Activation distance	10 mm	6 mm	5 mm	8 mm	5 mm
Switch point force	100 N	120 N	60 N	83 N	70 N
Overtravel*					
250 N	11 mm	27 mm	30 mm	38 mm	37 mm
400 N	15 mm	32 mm	32 mm	41 mm	53 mm

\*acc. to EN ISO 13856-2, temp. 23 °C, test object ø 80 mm, measuring point C3

# StandardLine


## Rubber profiles with standard mounting foot

### The tried-and-tested, reliable profile family

StandardLine offers the widest range of contours for all kinds of applications. We will be happy to present additional versions on request.

### EPDM, the robust material

All safety edges from Bircher Reglomat are made from EPDM. It is totally resistant to various materials and substances such as waste water, acetone, manganese sulphate, methyl alcohol, methyl phthalate as well as adequate resistance to acetaldehyde, methyl ethyl ketone, methyl chloride, cold lactic acid and other substances.






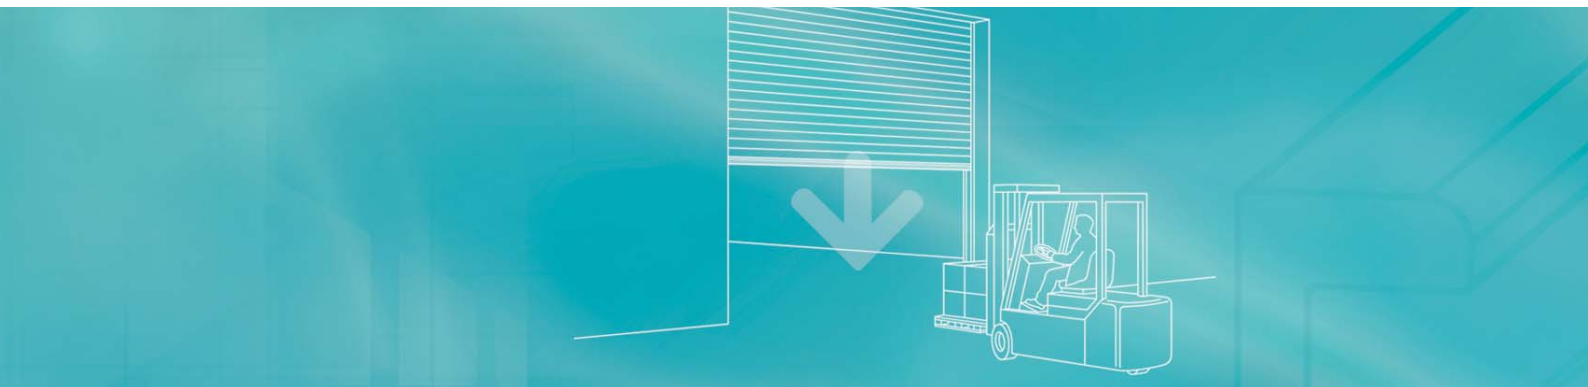


## StandardLine profile types

General technical data on rubber profiles and prefabricated safety edges can be found on the back page.

### Dimensions

(Dimensions in mm, tolerances acc. to DIN ISO 3302-1, tl. E2)




Rubber profile	EPE025/020A0K	EPE025/029A0L	EPE025/029A0K	EPE025/040A0K	EPE036/040A0D	EPE036/060A0D
Article no.	210732	210735	210733	210746	210753	210762
Packing unit	50 m	50 m	50 m	50 m	50 m	25 m
Aluminium rail (max. length 6 m)	AP-5	AP-7	AP-5	AP-5	AP-4	AP-4
Safety edges (prefabricated)	ELE025/020A0Kx	ELE025/029A0Lx	ELE025/029A0Kx	ELE025/040A0Kx	ELE036/040A0Dx	ELE036/060A0Dx
Activation distance	3 mm	7 mm	7 mm	4 mm	9 mm	5 mm
Switch point force	70 N	80 N	80 N	70 N	90 N	90 N
Overtravel*						
250 N	2 mm	6 mm	6 mm	9 mm	8 mm	13 mm
400 N	4 mm	10 mm	10 mm	12 mm	16 mm	30 mm


# Aluminium rails / switching devices

## The matching aluminium rail


Aluminium rails from Bircher Reglomat can be quickly and easily installed. Simply screw on, push in or click on the profile, and that's it.




**AP-5**  
Article no. 209583  
(max. length 6 m)




**AP-8**  
Article no. 209593  
(max. length 6 m)




**AP-7**  
Article no. 209591  
(max. length 6 m)




**AP-4**  
Article no. 209580  
(max. length 6 m)



**AP-G1**  
Article no. 209596  
(max. length 6 m)



**AP-5-F1**  
Article no. 311759  
(max. length 6 m)

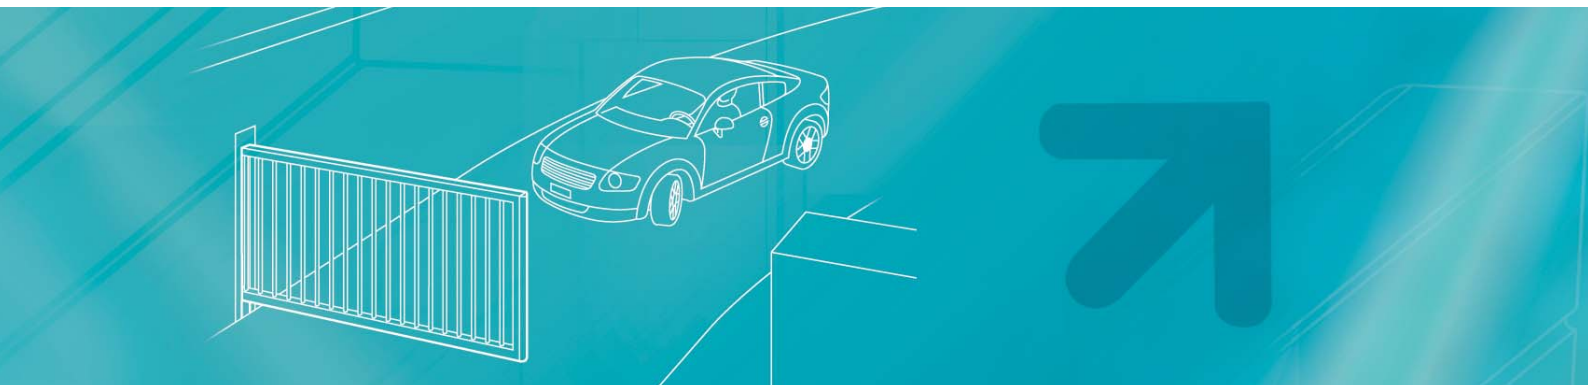

## Calculation model

For selecting the suitable safety edge.

It is important to establish the stopping and overtravel distances in order to guarantee the greatest possible safety

### Calculation of the stopping distance of hazardous parts ( $s_1$ ):

$$s_1 = \frac{1}{2} \times v \times T$$

### Calculation of the minimum overtravel of the safety edge $s$ :

$$s = s_1 \times C$$

#### Key

$v$  = Speed of the hazardous movement [mm/s]

$T$  = Run-on time of the entire system

(machine + safety edge) [s]

$C$  = Safety factor, at least 1,2 (a greater safety factor should be selected if there are other factors such as a brake system which might be damaged;  
→ EN ISO 13856-2)

## The right switching device for every application

Some examples.

Details and technical data, including on additional switching devices and transmission systems, can be found in the corresponding booklets or by request from us.

### Article no. Description

#### 299769 RFGate 2.1.F

Cat. 2 radio transmission system for automatic sectional, folding and sliding gates, evaluation of mobile safety edges with 8.2 kohm terminating resistor, 24 V ACDC supply voltage, IP55, dimensions 190 x 51 x 23/36 mm



#### 263911 EsGate 2

Cat. 2 safety switching device, 2 channels for 2 sensor with 8.2 kohm terminating resistor, 2 outputs, 24 V ACDC supply voltage, IP30, dimensions 22.5 x 94 x 90 mm



#### 256433 InTra6 2 SET02

Cat. 2 inductive transmission system for automatic sliding gates, evaluation of two mobile and two stationary safety edge circuits with 8.2 kohm terminating resistor, CLOSED and OPEN outputs, 24 V ACDC supply voltage, IP30, dimensions 22.5 x 94 x 90 mm



#### 210985 ESD3-04-24ACDC

2 channels for 2 sensors 8.2 kohm, 2 outputs, safety category 3 acc. to EN ISO 13849-1, connection voltage 24 V ACDC, mounting on DIN rail, dimensions 45 x 79 x 105 mm



## Order details

left/top



right/down

### Order details for prefabricated safety edges

ELE040/080A0J	2	/	1	/	2500	/	2	/	8K
<b>Type</b> See tables ClickLine → pg. 4 CoverLine → pg. 5 StandardLine → pg. 6	<b>Contact strip</b> 2 = ENT-R		<b>Profile endings</b> 1 = 8k2 resistor, with aluminium 2 = 2 cables, with aluminium 4 = 8k2 resistor, without aluminium 5 = 2 cables, without aluminium A1 = 8k2 resistor, with alu., bottom open, cable at the top A4 = 8k2 resistor, without alu., bottom open, cable at the top B1 = 8k2 resistor, with alu., bottom open, cable below B4 = 8k2 resistor, without alu., bottom open, cable below C2 = 2 cables, with aluminium, bottom open C5 = 2 cables, without aluminium, bottom open		<b>Length</b> Length of edge [mm]		<b>Cable</b> Length [m] / resistor (8K) left		<b>Cable</b> Length [m] / resistor (8K) right

### Order details for prefabricated contact strips

ENT-R	/	4	/	2500	/	2	/	8K
<b>Type</b> ENT-R		<b>End piece 2</b> 4 = 8k2 resistor, cable 5 = 2 cables		<b>Length</b> Length of strip [mm]		<b>Cable</b> Length [m] / resistor (8K) left		<b>Cable</b> Length [m] / resistor (8K) right

### Order details for components for self-assembly

#### Contact strip

Type	25 m roll	50 m roll	100 m roll
ENT-R	ENT-R/25 <b>238947</b>	ENT-R/50 <b>210718</b>	ENT-R/100 <b>210715</b>

#### End pieces (packaging unit 10 pcs.)

Type	8k2	without
Resist.	ENEH-8 <b>210642</b>	ENEH-0 <b>210626</b>

Type	0.5 m	2 m	4 m	7 m	10 m
Cable	ENEH-K05 <b>210649</b>	ENEH-K2 <b>210661</b>	ENEH-K4 <b>210670</b>	ENEH-K7 <b>210673</b>	ENEH-K10 <b>210654</b>

#### End caps (packaging unit 50 pcs.)

<b>209008</b>	<b>EN-C60</b>	End cap for rubber profile EPE036/040/045/060/065
<b>250333</b>	<b>EN-C29</b>	End cap for rubber profile EPE025/029
<b>256012</b>	<b>EN-C42</b>	End cap for rubber profile EPE030/042
<b>256017</b>	<b>EN-C55</b>	End cap for rubber profile EPE040/055
<b>256020</b>	<b>EN-C80</b>	End cap for rubber profile EPE040/080
<b>358715</b>	<b>EN-C81</b>	End cap for rubber profile EPE040/067/081
<b>210616</b>	<b>ENA-10</b>	Terminating band for rubber profile, 10 m roll (1 pc.), for cutting by customer
<b>219349</b>	<b>EN-KAS</b>	End piece for arcing chamber

#### Accessories / tools

<b>209249</b>	<b>EN-DS</b>	Sealing plug for arcing chamber, 50 pcs.
<b>209248</b>	<b>EN-DL</b>	Sealing plug with hole for cable, 50 pcs.
<b>210964</b>	<b>ES-BD</b>	Sealing compound for profile seal, 1 bag with strips (sufficient for about 50 edges)
<b>211010</b>	<b>ES-KLEBER</b>	Contact adhesive for sealing plugs, 20 g tube
<b>211739</b>	<b>ES-PRESS</b>	Pliers with jaws, bag of 1 (for pressing the end pieces onto the contact strips)
<b>212876</b>	<b>GUMMI-SCHERE</b>	Profile cutters, bag of 1 (for cutting a rubber profile)
<b>254924</b>	<b>EN-PHC</b>	Profile holder for CoverLine, 10 pcs.
<b>262494</b>	<b>EN-PHK</b>	Profile holder for ClickLine and StandardLine, 10 pcs.

## Technical data

### ENT-R contact strips

<b>Dimensions (max.)</b>	7.5 × 19 mm
<b>Operating temperature</b>	–25°C to +60°C
<b>Storage temperature</b>	–40°C to +80°C
<b>Material</b>	EPDM
<b>Contact material</b>	Conductive EPDM
<b>Current (min. / max.)</b>	1 mA / 100 mA
<b>Max. voltage</b>	30 VACDC
<b>Resistance per unit length</b>	< 2 Ohm/m
<b>Contact resistance</b>	Typ. < 200 ohm, max. < 500 Ohm
<b>Switching frequency</b>	> 100'000 (with test object ø 80 mm)

### Prefabricated safety edges

<b>Temperature range</b>	–20°C to +55°C
<b>Max. length</b>	6 m (longer lengths on request)
<b>Insulating strength</b>	1500 V AC
<b>Max. load capacity</b>	500 N
<b>Dead zone</b>	20 mm (ELE040/105A0J2: 0 mm)
<b>Switching frequency</b>	> 10'000 (with test object ø 80 mm)
<b>Connection cable</b>	Double-jacketed cable, PVC, ø 4.7 mm, strain relief wire 2 × 0.34 mm <sup>2</sup> , min. bending radius 10 mm, non-detachable
<b>Protection class</b>	IP65
<b>Standards conformity</b>	EN 12978, EN ISO 13856-2

#### Note

Technical details and recommendations concerning our products are based on experience and are an aid for the orientation of the user. Details stated in our brochures and data sheets do not guarantee special properties of the products. This does not apply to special product properties confirmed in writing or individually on a case-by-case basis. Subject to technical alterations.

## Your contact

### Bircher Reglomat AG

Wiesengasse 20  
CH-8222 Beringen  
Phone +41 52 687 11 11  
Fax +41 52 687 12 10  
info@bircher.com  
www.bircher-reglomat.com